

EASY SHOWER

儲水式電熱水器種類

Storage Type Electric Water Heater

中央系統式電熱水器

中央系統式電熱水器適合2個水喉接駁位(冷水及熱水)，同時可接駁多個出水位供應熱水，如浴缸、花灑、洗手盆及廚房等。

Central storage type



Central storage type is suit for 2 faucets (i.e. with both hot and cold water taps available), and can supply hot water for multi outlets, such as bath tub, shower, bathroom sink and kitchen to use.

花灑式電熱水器

花灑式電熱水器適合只有1個水喉接駁位的用戶，亦只可供應1個熱水出水位作花灑淋浴，而且必須配合使用無阻塞的開放式之混合水龍頭及花灑頭。

Shower type

Shower type is suit for only one faucet (i.e. only cold water tap available), it can only supply hot water to 1 outlet for shower, and must be used in conjunction with the shower init provided.

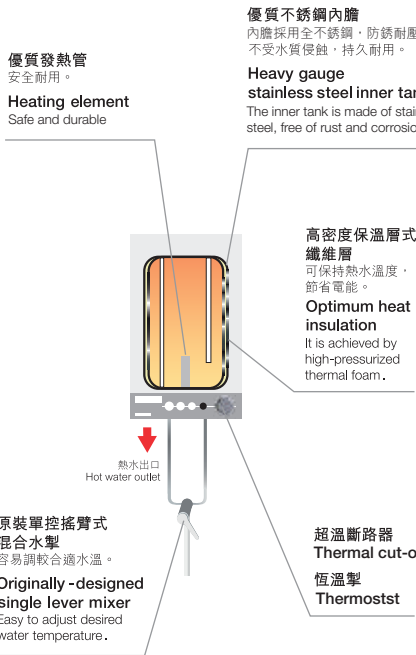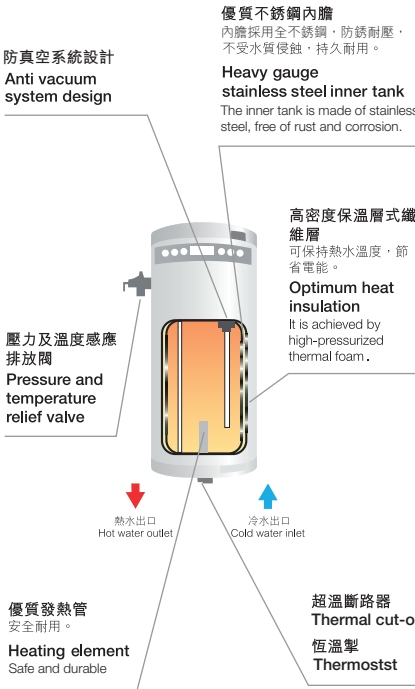

速熱儲水式電熱水器

Speed Heat Storage Type Electric Water Heater



內容	Description	速熱中央儲水式 Speed Heat Unvented Type	速熱花灑儲水式 Speed Heat Shower Type
型號	Model	ZWH-SH30*	ZWH-SH21
機身外殼	Cabinet color	白色易潔外殼 White enamel	
功率 / 電壓 (千瓦 / 伏特)	Rating/Voltage (kW/V)	3/220	3/220
機身尺寸 (闊x高x深) (毫米)	Dimensions (WxHxD) (mm)	335 x 650 x 325	375 x 603 x 248
機身尺寸 (闊x高x深) (吋)	Dimensions (WxHxD) (inches)	13 1/5 x 25 3/5 x 12 4/5	14 4/5 x 23 4/5 x 9 4/5
容量 (加侖/升)	Capacity (Gallitre)	7.9/30	5.5/21
淨重 (千克)	Weight (kg)	14.8 (無水 Empty)	10.7 (無水 Empty)
溫度設定	Temperature Setting	由冷水至 75 度水溫 From antifreeze to 75 °C	
壓力及溫度感應排放閥	P & T Relief Valve	澳洲	—
防真空系統設計	Anti Vacuum System Design	有 Yes	—
花灑套裝	Shower set	一級恆水	
出入水喉管 (吋)	Pipe Connection (inches)	1/2	
能源效益級別	Energy Efficiency Grading	1	
入水要求：自來水或水箱供應 試水壓力：2,000 kPa (20 bar) 入水壓力：700 kPa (7 bar) 或以下			
		Water Supply Source : main or water tank Water Test Pressure : 2,000 kPa (20 bar) Water Supply Pressure : 700 kPa (7 bar) or below	

*以上儲水式高壓電熱水器有左邊及右邊壓力及溫度感應排放閥可供選擇
Above unvented storage type electric water heaters come with left or right pressure and temperature relief valve for selection
規格如有更改，恕不另行通知
All specifications are subject to change without notice

儲水式高壓電熱水器

Unvented Storage Type Electric Water Heater



內容 Description		
型號 Model	ZWH-38/3T	ZWH-25/3T
機身外殼 Cabinet color	白色易潔外殼 White enamel	
功率 / 電壓 (千瓦 / 伏特) Rating/Voltage (kW/V)	3 / 220	3 / 220
機身尺寸 (闊x高x深)(毫米) Dimensions (WxHxD) (mm)	346 x 665 x 358	310 x 685 x 310
機身尺寸 (闊x高x深)(吋) Dimensions (WxHxD)(inches)	13 3/5 x 26 1/4 x 14 1/10	12 1/4 x 27 x 12 1/4
容量 (加侖/升) Capacity (Gallitre)	10 / 38	6.5 / 25
淨重 (千克) Weight (kg)	15 (無水 Empty)	12 (無水 Empty)
溫度設定 Temperature Setting	由冷水至 75 度水溫 From antifreeze to 75 °C	
壓力及溫度感應排放閥 P & T Relief Valve	澳洲	
防真空系統設計 Anti Vacuum System Design	有 Yes	
出入水喉管 (吋) Pipe Connection (inches)	1/2	
能源效益級別 Energy Efficiency Grading	1	
入水要求：自來水或水箱供應 試水壓力：2,000 kPa (20 bar) 入水壓力：700 kPa (7 bar) 或以下	Water Supply Source : main or water tank Water Test Pressure : 2,000 kPa (20 bar) Water Supply Pressure : 700 kPa (7 bar) or below	

以上儲水式高壓電熱水器有左邊及右邊壓力及溫度感應排放閥可供選擇
Above unvented storage type electric water heaters come with left or right pressure and temperature relief valve for selection
規格如有更改，恕不另行通知
All specifications are subject to change without notice

花灑式電熱水器

Shower Type Electric Water Heater



內容 Description	ZWH-T18
型號 Model	ZWH-T18
機身外殼 Cabinet color	白色易潔外殼 White enamel
功率 / 電壓 (千瓦 / 伏特) Rating/Voltage (kW/V)	3 / 220
機身尺寸 (闊x高x深)(毫米) Dimensions (WxHxD) (mm)	305 x 570 x 260
機身尺寸 (闊x高x深)(吋) Dimensions (WxHxD)(inches)	12 x 22 1/2 x 10 1/4
容量 (加侖/升) Capacity (Gallitre)	5 / 18
淨重 (千克) Weight (kg)	9 (無水 Empty)
溫度設定 Temperature Setting	由冷水至75度水溫 From antifreeze to 75 °C
出入水喉管 (吋) Pipe Connection (inches)	1/2
能源效益級別 Energy Efficiency Grading	1

不受任何水壓限制，只要有冷水供應便可
No restriction to water supply pressure, it works well with cold water supply

以上花灑式電熱水器均連單控混合水掣
Above shower type electric water heaters come with a single mixer
規格如有更改，恕不另行通知
All specifications are subject to change without notice